

**Variable speed control dial**



allows operator to adjust cutting speed depending on material or application.

**Dual LED job lights**



**XPT**  
EXTREME PROTECTION TECHNOLOGY

Dust and drip-proof performance is enhanced for use in outdoor applications or harsh environments.

**Makita** Cordless Rotary Hammer **DHR400** 40 mm (1-9/16")




**Accessories**

**Dust Extractor Attachment Set**

Part No. 199142-6

Drilling mode

Hammering mode

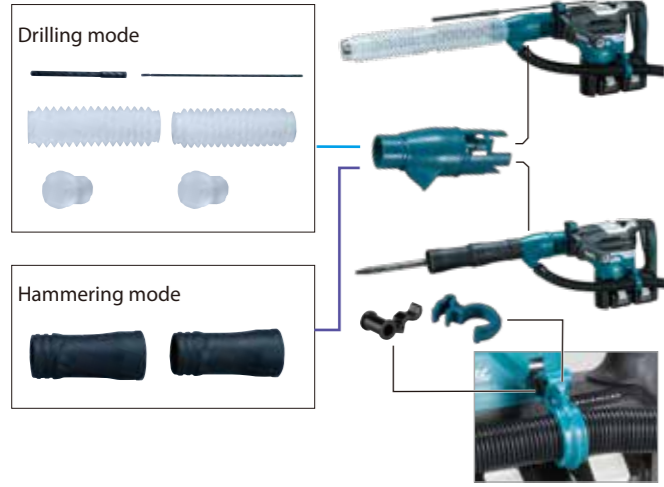

**Dust Extractor Attachment Set**  
Hammering only

without Vacuum hose set  
Part No. 199143-4

with Vacuum hose set  
Part No. 199144-2



**Li-ion Battery & Charging Time Reference, Compatibility Chart**

|                                 |                      |   |   |   |   |   |
|---------------------------------|----------------------|---|---|---|---|---|
|                                 |                      |   |   |   |   |   |
|                                 | BL1815N<br>18V 1.5Ah | BL1820B<br>18V 2.0Ah<br>with Battery fuel gauge | BL1830B<br>18V 3.0Ah<br>with Battery fuel gauge | BL1840B<br>18V 4.0Ah<br>with Battery fuel gauge | BL1850B<br>18V 5.0Ah<br>with Battery fuel gauge | BL1860B<br>18V 6.0Ah<br>with Battery fuel gauge |
| Two Port Multi Fast Charger<br> | 15 min               | 24 min  | 22 min  | 36 min  | 45 min  | 55 min  |



**Cordless Rotary Hammer DHR400** 40 mm (1-9/16")

- Variable Speed
- Brake
- Reversing
- SDS-MAX Shank
- Torque Limiter
- Constant Speed
- Soft Start
- Dust Collection
- Built-in Job Light
- Carrying Case

**Impact Energy** EPTA-Procedure 05/2009: 8.0 J  
Our experimental conditions: 11.4 J

**Capacity** Concrete (w/ T.C.T. bit) : 40 mm (1-9/16")  
Concrete (w/ Core bit) : 105 mm (4-1/8")

**Blows Per Minute (BPM)** 1,450 - 2,900

**No Load Speed (RPM)** 250 - 500

**Sound Pressure Level** 91 dB(A)

**Sound Power Level** 102 dB(A)

**Vibration Level** Hammer Drilling Into Concrete: 5.0 m/s<sup>2</sup>

**Dimensions (L x W x H)** 473x120x285 mm  
(18-5/8"x4-3/4"x11-1/4")

**Net weight** 7.3 - 8.1 kg (16.1 - 17.9 lbs)

**Standard Equipment:**  
Side Handle, Side Grip, Depth Gauge, Bit Grease, Cloth, Wireless Unit (country-specific), Battery, Charger

The weight may differ depending on the attachment(s), including the battery cartridge. The lightest and heaviest combination, according to EPTA-Procedure 01/2014, are shown in the table. Items of standard equipment and specifications may vary by country or area.

**Makita Corporation**

3-11-8 Sumiyoshi-cho, Anjo, Aichi, 446-8502 Japan

PRINTED IN JAPAN 201801

**High Power similar to AC Tool**



Extra Comfort with unrivaled low level of vibration

**AVT & SOFT**  
ANTI VIBRATION TECHNOLOGY NO LOAD





Adapted for SDS-MAX bits

# Excellent performance equivalent to AC Model



Newly developed BL motor delivers high power



## Drilling work amount

Work volume on a single full battery charge

About **25** holes

- ◆ w/ T.C.T. bit Ø18mm
- ◆ Depth : 140mm
- ◆ Concrete : 40 N / mm<sup>2</sup>
- ◆ Battery : BL1850B x2

## Demolition work

with bull point

### Impact Energy

[EPTA-Procedure 05/2009]

**8.0 J**

Makita HR4013C 8.0J



# AVT & SOFT NO LOAD

ANTI VIBRATION TECHNOLOGY

Vibration absorbing housing isolates handle and motor.

Active dynamic vibration absorber moves in the opposite direction to the drive piston to reduce vibration.

Damper spring absorbs impact vibrations from the drill bit.



Auto-start Wireless System



Wireless unit

Part No.  
198901-5,  
198900-7(EU)



Switch on the tool  
Vacuum cleaner is activated



■ Comparison of Vibration level\* and Time to reach ELV (Exposure Limit of Vibration)\*\*

\* It is known as the tri-axial value and value at Directive of A(8).

\*\*It means the maximum amount of vibration that an operator may be exposed to on any single day.

| Time to reach ELV (min)             | 100                 | 200 | 550    |
|-------------------------------------|---------------------|-----|--------|
| Makita DHR400                       | 5.0m/s <sup>2</sup> |     | 540min |
| Makita HR4013C                      | 5.0m/s <sup>2</sup> |     | 540min |
| Vibration level (m/s <sup>2</sup> ) | 0                   | 5   | 10 15  |

## AWS connects to power tool via Bluetooth.

Wireless unit



The Bluetooth® word mark and logos are registered trademarks owned by the Bluetooth SIG, Inc. and any use of such marks by Makita is under license. Other trademarks and trade names are those of their respective owners.

## Expand AWS Line-up

